


## Important Lid Grill Information For 2014-2023 "RM" Lids

If you are seeing this document, you are most likely looking for new lid grills, or have some on their way. Please make sure to follow the IMPORTANT points below to make sure your grills stay in place! During the design phase of the lids, we made sure the grills would stay in place when properly installed! The use of hand tools is strongly suggested so the bosses on the grills don't get stripped out.

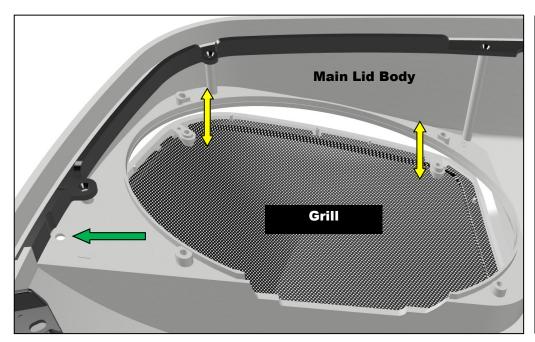


The yellow arrows are where speaker mounting screws go through the lid, through the speaker mounting holes and into the "bosses" on the grills to properly secure the grills.

The supplied screws work for Hogtunes/Wild Boar Speakers. If you are using another brand of speaker, the "top gasket" may be thicker making the supplied screws not long enough.

## Please ensure the screws used are long enough for your speakers!

The green arrow is where a supplied screw attaches the grill to the lid.

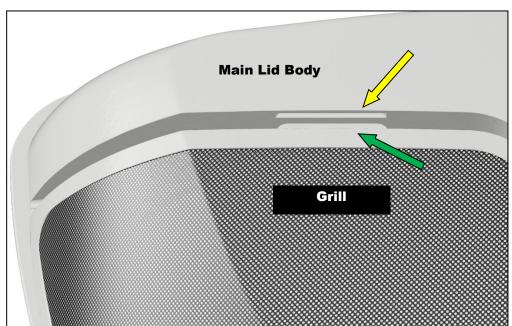

The yellow arrow shows a 2" long "slot" in the lid body where a 1-7/8" tab on the grill (shown by green arrow) slides into, further securing the grill to the lid. The grill cannot mount to the lid unless this tab is correctly seated.